



ARCTIC CHILL109

High-capacity hydration on demand. Designed for busy environments with a generous bottle-filling height.

Floor Standing or Table Top | Ambient & Chilled

Suitable for any busy space

The ArcticChill 109 makes it easy for you to offer busy workplaces a reliable chilled and ambient water solution, with a generous bottle-friendly dispense area designed for modern hydration needs.

Flexibility across all customer sites

Available as both floor-standing and table-top models, the ArcticChill 109 makes it easy for you to offer the right solution for different sites, spaces and contract needs.

High value potential

Optional upgrades such as UVC purification, remote monitoring, overflows, cup holders, rails and filter kits give you more ways to add value, increase contract appeal and support stronger rental packages.

Confidence in every installation

Built on a tried-and-tested design, with flood guard protection and solenoid taps as standard, the ArcticChill 109 gives you a dependable cooler you can supply, rent and maintain with confidence.



 25-35 Users

 29cm Dispense Height

 23kg | 16kg



Ambient



35L/H



-



-

Ambient

35L/H

-

-



Touch Control

Touch control makes drink selection easy and intuitive, especially when combined with the LED indicators.

Classic ArcticChill Logo

Ensures a uniform look across your cooler offering, allowing you to present a cohesive offering to your customers.

Dispense Button

Classic dispense button design makes operating the 109 simple and accessible for all.


Hygiene Guard

Built in hygiene protection helps keep your water safe whilst being dispensed, giving you peace of mind.

Dispense Height

The 109 features a large 29cm dispense height, perfect for sports bottles and jugs.

Dimension Drawing

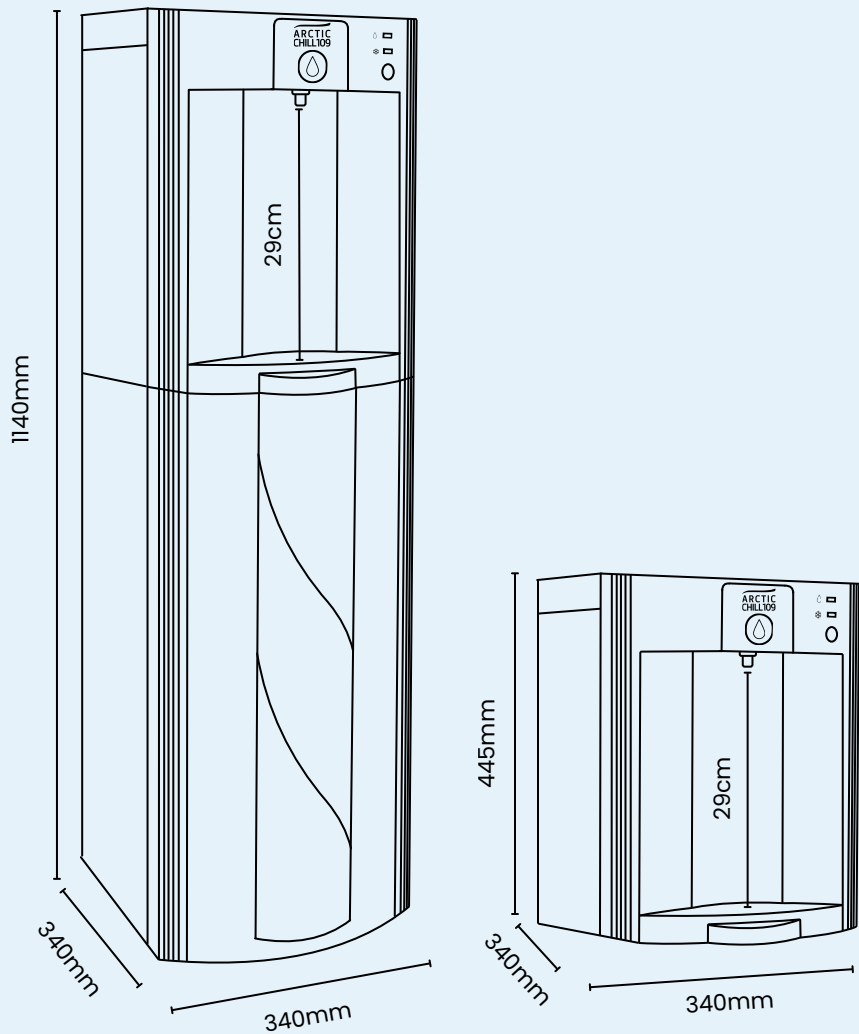

Models

Code	WCPC109	WCPTC109
Output	Ambient & Chilled	Ambient & Chilled
Capacity	Ambient & 35L/H Chilled	Ambient & 35L/H Chilled
Classification	Floor Standing	Table Top
Water Supply	POU (point of use)	Point of Use (POU)
Chilling System	Direct Chill	Direct Chill
Weight	23kg	16kg
Dispense Height	29cm	29cm
Dimensions (H x W x D)	1140mm x 340mm x 340mm	445mm x 340mm x 340mm

Temperature

Cold Temperature Control	Thermistor	Thermistor
Hot Temperature Control	N/A	N/A
Thermal Cut Out	N/A	N/A
Cold Output Temperature*	10°C (or below)	10°C (or below)
Hot Output Temperature*	N/A	N/A

**based on an inlet water temperature of 16°C*

Components & Power

Cold Tank Material	Stainless Steel (STS304)	Stainless Steel (STS304)
Cold Tank Capacity	1L	1L
Hot Tank Material	N/A	N/A
Hot Tank Capacity	N/A	N/A
Refrigerant	R600a	R600a
Condenser	Wire Type	Wire Type (fan assisted)
Cold Wattage	95w	95w
Hot Wattage	N/A	N/A
Volatge	220v - 240v	220v - 240v
Standby Usage (24h)	0.16kwh	0.16kwh
Power Supply	UK 3 Pin Plug	UK 3 Pin Plug
Power Cord Length	1.5m	1.5m