



POWER STREAM

Modern and premium dispensing tap
that can be tailored for any installation

Ambient, Chilled, Sparkling & Hot

Premium European Craftsmanship

Manufactured in Italy by Cosmetal, the Power Stream is crafted from high-quality brushed stainless steel to deliver exceptional durability, reliability and contemporary style. Built to perform in demanding commercial environments, it's a premium solution you and your customers can trust.

Build Your Perfect System


The Power Stream tap is supplied complete with a drip tray and temperature control box. Simply pair it with our compatible H2OMY IN WG chiller for chilled and sparkling water output, and add the undersink boiler to enable instant hot water dispensing.

Minimal Footprint. Maximum Impact.

Creates a clean, uncluttered workspace while maximising usable surface area. The result is a sophisticated, space-saving solution that enhances any modern commercial environment.

Easy to Clean & Maintain

Designed to withstand the demands of everyday commercial use while offering a hygienic, low-maintenance dispensing solution that anyone can enjoy.

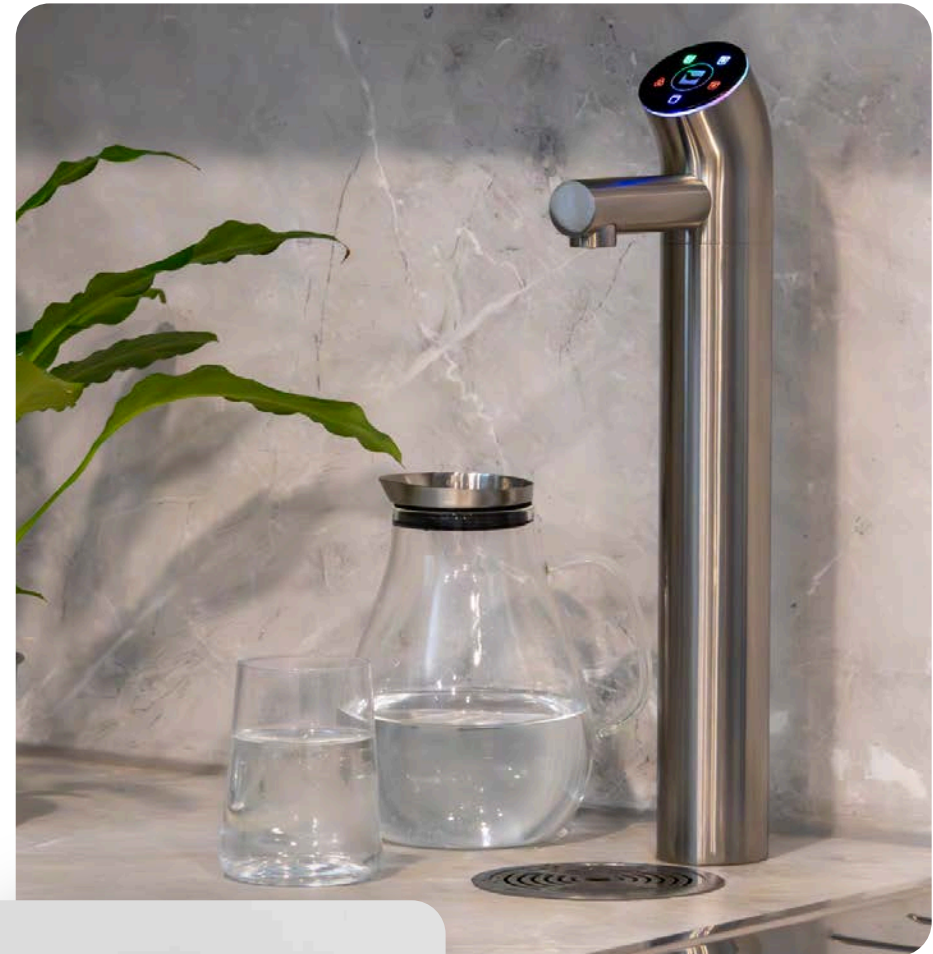

10-20 Users



36cm or 22cm
Dispense Height



1.8kg – 2.5kg



Ambient



15L/H



15L/H



–

Ambient

15L/H

15L/H

55L/H



Touch Temp Selection

Intuitive touch-selection panel. Simply touch once to start dispensing your desired water type.

Safety Lock

Integrated hot water safety lock helps prevent accidental dispensing.

LED Dispense Indicator

Premium LED detailing, changes to colour when dispensing to reflect the output water temperature.


Dispense Height Options

The low height offers a practical 22cm dispense height, whilst the high model offers an impressive 36cm clearance.

Premium Build Quality

Built using high-quality brushed stainless steel. Sturdy, hygienic and easy to clean.

Dimension Drawing

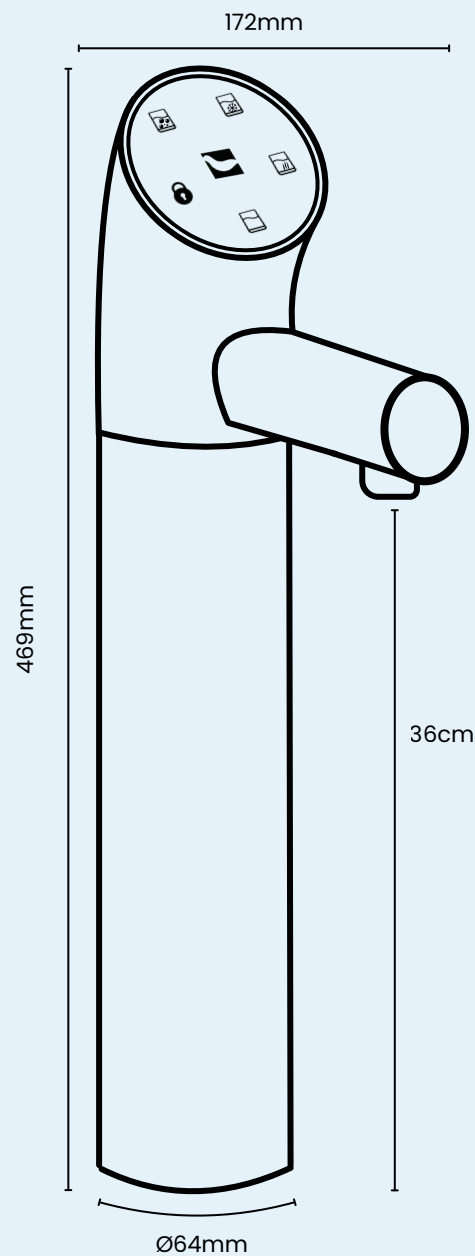

Models

Code	CETAP-TOWER-H-ACWG	CETAP-TOWER-H-ACHWG
Output	Ambient, Chilled & Sparkling	Ambient, Chilled, Sparkling & Hot
Capacity	15L/H Chilled & Sparkling	15L/H Chilled & Sparkling & 55L/H Hot
Classification	Counter Top	Counter Top
Water Supply	POU (point of use)	POU (point of use)
Chilling System	Ice Bank (undersink chiller)	Ice Bank (undersink chiller)
Weight	2.5kg	2.5kg
Dispense Height	36cm	36cm
Dimensions (H x W x D)	469mm x Ø64mm x 172mm	469mm x Ø64mm x 172mm

Temperature


Cold Temperature Control	Manual (undersink chiller)	Manual (undersink chiller)
Hot Temperature Control	N/A	N/A
Thermal Cut Out	N/A	N/A
Cold Output Temperature*	3°C - 10°C	3°C - 10°C
Hot Output Temperature*	N/A	98°C

**Based on an inlet water temperature of 16°C & using H2OMY chiller*

Power & Components

Cold Tank Material	Stainless Steel	Stainless Steel
Cold Tank Capacity	1.5L	1.5L
Hot Tank Material	N/A	Stainless Steel
Hot Tank Capacity	N/A	5L
Refrigerant	R290	R290
Condenser	Static	Static
Cold Wattage	210w	210w
Hot Wattage	N/A	2600w
Voltage	230v - 240v	230v - 240v
Standby Usage (24h)	-	-
Power Supply	UK 3 Pin Plug	UK 3 Pin Plug
Power Cord Length	1.5m	1.5m

Dimension Drawing

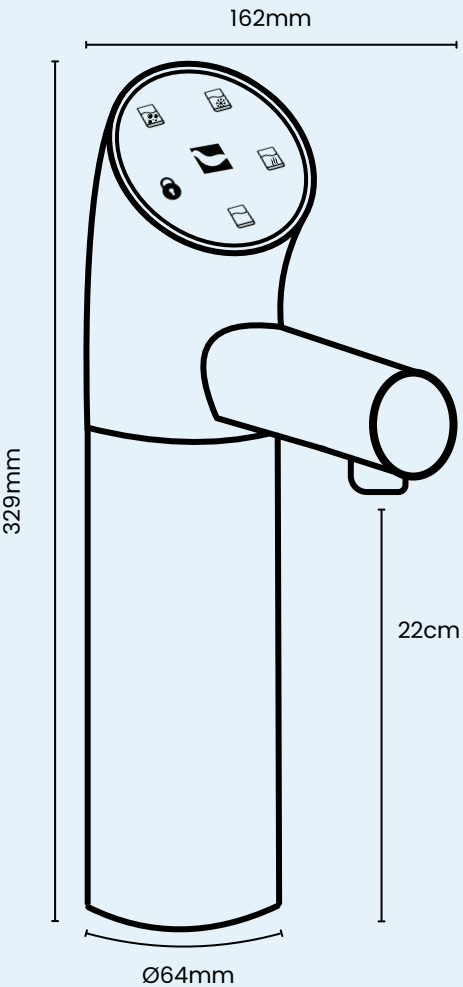

Models

Code	CETAP-TOWER-L-ACWG	CETAP-TOWER-L-ACHWG
Output	Ambient, Chilled & Sparkling	Ambient, Chilled, Sparkling & Hot
Capacity	15L/H Chilled & Sparkling	15L/H Chilled & Sparkling & 55L/H Hot
Classification	Counter Top	Counter Top
Water Supply	POU (point of use)	POU (point of use)
Chilling System	Ice Bank (undersink chiller)	Ice Bank (undersink chiller)
Weight	1.8kg	1.8kg
Dispense Height	22cm	22cm
Dimensions (H x W x D)	329mm x Ø64mm x 162mm	329mm x Ø64mm x 162mm

Temperature

Cold Temperature Control	Manual (undersink chiller)	Manual (undersink chiller)
Hot Temperature Control	N/A	N/A
Thermal Cut Out	N/A	N/A
Cold Output Temperature*	3°C - 10°C	3°C - 10°C
Hot Output Temperature*	N/A	98°C

Power & Components

Cold Tank Material	Stainless Steel	Stainless Steel
Cold Tank Capacity	1.5L	1.5L
Hot Tank Material	N/A	Stainless Steel
Hot Tank Capacity	N/A	5L
Refrigerant	R290	R290
Condenser	Static	Static
Cold Wattage	210w	210w
Hot Wattage	N/A	2600w
Voltage	230v - 240v	230v - 240v
Standby Usage (24h)	-	-
Power Supply	UK 3 Pin Plug	UK 3 Pin Plug
Power Cord Length	1.5m	1.5m