



ARCTIC CHILL108

Versatile cooler dispensing crisp, chilled water on demand. Exactly what you need, when you need it.

Floor Standing or Table Top | Chilled Only

Straightforward Operation

Simple by design, this cooler delivers only chilled water, the most in-demand temperature for everyday use. A single button keeps operation clear and effortless. No unnecessary steps, just easy, reliable performance.

Versatile Model Options

Built for flexibility, this cooler is available as floor standing or tabletop to suit any space. Compatible with key accessories such as our installation kits, UVC disinfection system, contactless dispensing, overflow kits and mains drainage.

Classic Design

Built using our timeless cooler template, the ArcticChill 108 retains our proven design foundation that you rely on. With a subtle, understated finish, it blends seamlessly into any environment.

Hygiene Focused

The ArcticChill 108 features an integrated hygiene guard to protect the dispensing nozzle from any contaminants. This cooler is also compatible with our UVC disinfection system for maximum security and safeguarding.



 25-35 Users

 29cm Dispense Height

 23kg | 16kg



- 35L/H - -

- 35L/H - -



System Indicators

Helpful LED lights indicate when your cooler is ready to use.

Precision-printed Branding

Featuring high-durability branding, printed onto the upper front panel.

Dispense Button

Easy to use, push button operation makes this cooler ideal for most people to use with confidence.


Hygiene Guard

Built in hygiene protection helps keep your water safe whilst being dispensed, giving you peace of mind.

Dispense Height

The 108 features a large 29cm dispense height, ideal for sports bottles and jugs.

Dimension Drawing

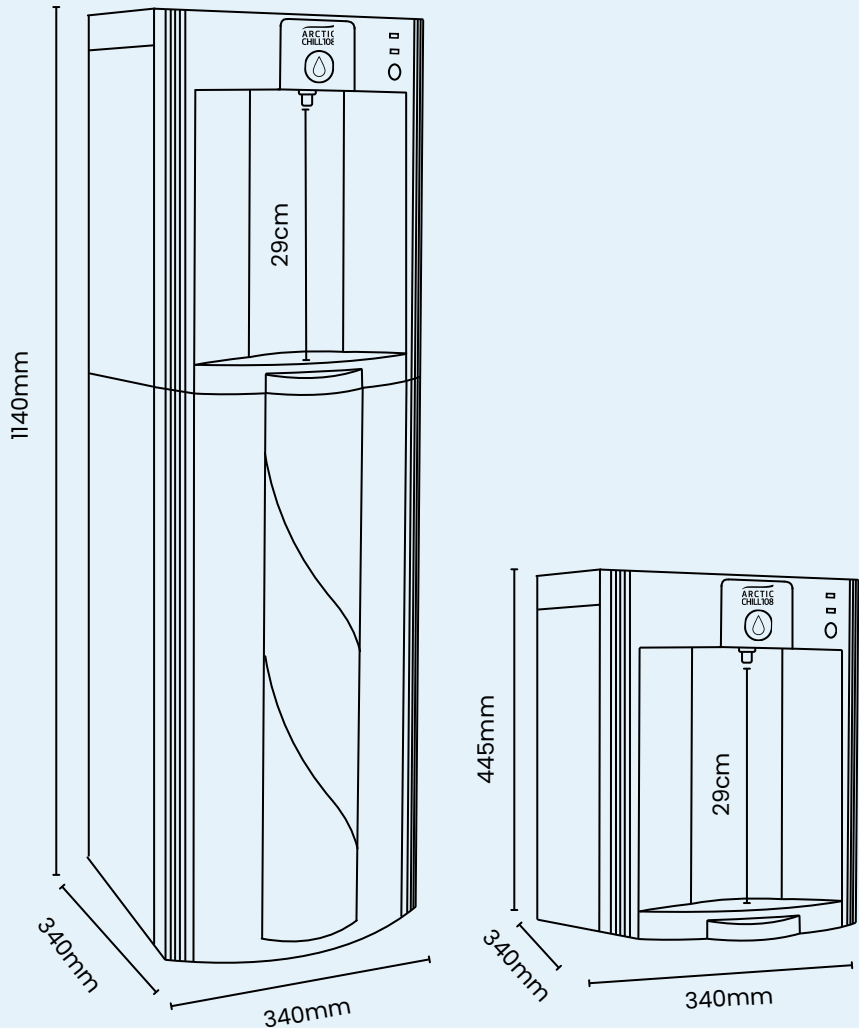

Models

Code	WCPC108	WCPTC108
Output	Chilled	Chilled
Capacity	35L/H Chilled	35L/H Chilled
Classification	Floor Standing	Table Top
Water Supply	POU (point of use)	Point of Use (POU)
Chilling System	Direct Chill	Direct Chill
Weight	23kg	16kg
Dispense Height	29cm	29cm
Dimensions (H x W x D)	1140mm x 340mm x 340mm	445mm x 340mm x 340mm

Temperature

Cold Temperature Control	Thermostat (5°C-7°C)	Thermostat (5°C-7°C)
Hot Temperature Control	N/A	N/A
Thermal Cut Out	N/A	N/A
Cold Output Temperature*	10°C (or below)	10°C (or below)
Hot Output Temperature*	N/A	N/A

**based on an inlet water temperature of 16°C*

Components & Power

Cold Tank Material	Stainless Steel (STS304)	Stainless Steel (STS304)
Cold Tank Capacity	1L	1L
Hot Tank Material	N/A	N/A
Hot Tank Capacity	N/A	N/A
Refrigerant	R600a	R600a
Condenser	Wire Type	Wire Type (fan assisted)
Cold Wattage	95w	95w
Hot Wattage	N/A	N/A
Volatge	220v - 240v	220v - 240v
Standby Usage (24h)	0.16kwh	0.16kwh
Power Supply	UK 3 Pin Plug	UK 3 Pin Plug
Power Cord Length	1.5m	1.5m